

# MOUNTING THE BAZOOKA

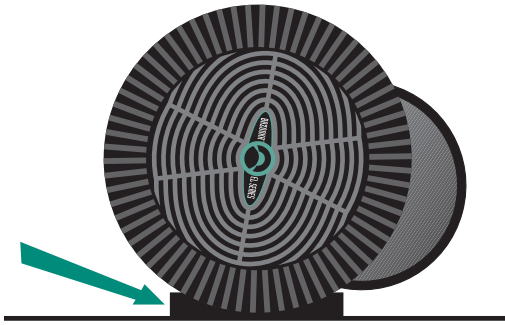


Figure 7

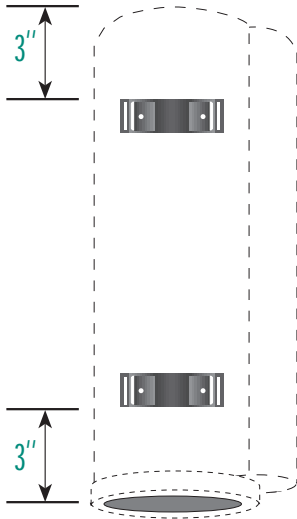


Figure 8


3. Place each mounting base under the Bazooka so that the apex at the bottom of the tube sits inside the mounting base as in figure 7.

4. Move the bases so that they are spaced approximately 3" from each end of the enclosure as illustrated in figure 8.

5. Remove the Bazooka without moving the mounting bases and set it aside.

6. Screw each mounting base securely in place with screws provided as illustrated in figure 6.

## MOUNTING THE BAZOOKA

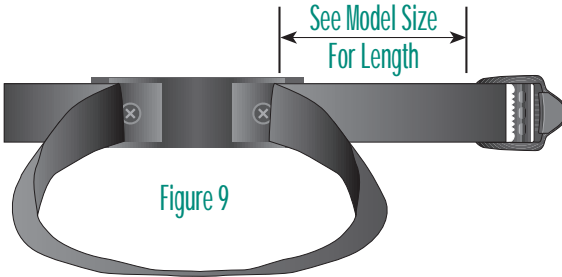

Model	Length
EL5A	12"
EL6A	17"
EL8A	22"



7. Adjust buckle end of strap so that it extends out of the mounting base (see figure 9) the proper length for the model size of Bazooka you are installing (Refer to the chart for proper length)

8. Remove any slack in the strap by feeding it out of the mounting base on the loose end of the strap opposite the buckle.

9. Place Bazooka on the mounting bases and fasten the buckles as illustrated in figure 10. The strap should loop through the buckle and be tightened securely by holding the strap in place with one hand and pulling the loose end away from the buckle, but against the cabinet.

### Technical Note

Due to the jarring and shifting that can occur in a vehicle, the mounting straps may stretch or loosen. We recommend that you check the straps regularly to assure that your Bazooka is mounted securely in place.